

Effect of Pre-Combustion and Post-Combustion Sequestration of Carbon Dioxide on Global Warming Potential

Mahidhar Duggal, Assistant Professor ,

School of Mechanical Engineering, Lovely Professional University.

Ujjwal Makkar, Assistant Professor,

School of Mechanical Engineering, Lovely Professional University.

Moolchand Prajapati, Student

School of Mechanical Engineering, Lovely Professional University.

Abstract. From the beginning of the industrial revolution time period, the exhausted gas from burning of fossil fuels and huge clearing of forest has contributed to rise in the level of carbon dioxide (CO₂) in the atmosphere. The earth surface temperature is expected to surge by 1.5 degree centigrade as per the intergovernmental panel on climate change in coming decades, if greenhouse gas emissions continue at present rate in the atmosphere. Therefore, upcoming little year climate change and global warming will be challenged in the future. To decrease the growth of greenhouse gases and its consequences, the carbon capture and sequestration (CCS) techniques will be needed. Carbon capture and sequestration is best techniques among others. Present work estimates the impact of pre-and post-combustion sequestration of carbon dioxide (CO₂) on global warming potential. The Objective of study is to compare the pre-and post-combustion CO₂ capture process employing the chemical absorption technology, to estimate the CO₂ capturing efficiency of solvents at various operating condition such as weight concentration of solvents, flow rate of amine solution, height of absorber column and temperature flue gas and effect of pre-and post-combustion CO₂ sequestration on global warming potential. The absorbents used for CO₂ capture by chemical absorption are Monoethanolamine and Diethanolamine. In this work, comprehensive flow sheet model have built for each of the solvents systems, using Chemcad 6.1.3 as the modeling tool.

Key words: Carbon capture and sequestration (CCS), precombustion and postcombustion CO₂ capture, chemical absorption, monoethanolamine, diethanolamine.

1. Introduction

Carbon dioxide (CO₂) is the main greenhouse gas among all greenhouse gases, but CO₂ is also essential gas for life, human and animal exhale it and plants sequester it [1, 2]. It exists in earth's atmosphere in comparably less concentration. But after industrial revolution

started, the demand of fossil fuel is increasing, due to increasing demand of fossil fuel; fossil fuel has led to rapid increases in CO₂ emission [3, 4]. In atmosphere CO₂ emission is estimated in terms of CO₂ concentration, from 1960 to 2018 the CO₂ emission increased from 310 to 407.06 and continues to increase at a higher rate [5, 6]. To maintain the concentration of CO₂ and earth surface temperature we need to control the CO₂ emission from industry such as coal based power plants because 42% of CO₂ of total CO₂ emission comes from coal based power plants. Therefore, for reduction of CO₂ emission we need to capture and store the CO₂ which is exhausted from fossil fuel power plants [7-9]. Carbon dioxide (CO₂) capture and storage (CCS) is a technology, which through large reduction of CO₂ emission can be achieved within 10-20 years. The global CO₂ emission can be reduced by approximately 70% by 2050, with the help of CCS technology [5, 10]. There are mainly three most promising carbon dioxide capture techniques available such as pre-combustion, post-combustion and oxy-fuel combustion [3-10]. There are several methods exist to capture the carbon dioxide from flue gas which is exhausted from power plants. Chemical absorption is the most significant carbon dioxide capture method in amine aqueous solution among other methods. The Monoethanolamine (MEA) aqueous solution is the most common absorbent used in the absorber-stripper CO₂ capture system. Diethanolamine (DEA) and methyldiethanolamine (MDEA) are also mostly used absorbents after monoethanolamine [11-17]. The motive of this paper is as follows: to compare study of two different absorbents such as (MEA and DEA) for pre and post-combustion chemical absorption techniques and compare their carbon dioxide capturing efficiency at various conditions by simulation on flow-sheet simulator ChemCad6.1.3 with applied amine model, to study the different operational conditions at which carbon dioxide capturing efficiency of absorbents depends, to study how carbon dioxide capturing efficiency of solvents increases or decreases varies with weight percentage concentration of solvents, flow rate of amine solution, absorber column height and flue gas temperature and to study the effect of precombustion and postcombustion carbon dioxide capture techniques on global warming potential of greenhouse gases.

Table 1 Column specification data

Parameters	Flow rate of flue gas	Temperature of flue gas	Pressure of flue gas	Flow rate of amine solution	Weight concentration of absorbents	Height of absorber column	Diameter of absorber column	No. of Stages in absorber column
------------	-----------------------	-------------------------	----------------------	-----------------------------	------------------------------------	---------------------------	-----------------------------	----------------------------------

Data range	2095 kmol/h	273 K-333 K	1 bar	100-600 std liter/min	10%-70%	0.1-4.2 m	7.8 m	10
------------	-------------	-------------	-------	-----------------------	---------	-----------	-------	----

2. The absorption process description

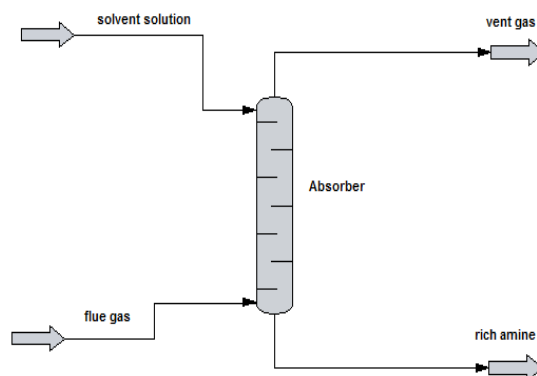


Figure 1 schematic flow diagram of amine absorption process

Figure 1 show the schematic flow diagram of amine absorption process, which include two inlet stream line such as (solvents solution and flue gas) connected with absorber column and two outlet stream product line such as (vent gas and rich amine). The solvents amine solution stream enter in the absorber column with flow rate (100-600 std liter/min) at top of the absorber column whereas flue gas stream enter in the absorber column with flow rate 2095 kmol/hr at bottom of absorber column. In pre-combustion case the composition of flue gas are; 39% CO₂, 58.2% H₂, 2.4% CO, 0.2%N₂ and 0.1% H₂S while for post-combustion case the composition of flue gas are; 10.3072% CO₂, 75% N₂, 10% H₂O and 4% O₂. When amine solution enters at top of absorber and reacts with flue gas which came from bottom of the absorber the exothermic chemical reaction begin started and carbon dioxide is absorber by solvents for both case precombustion and postcombustion carbon dioxide capture techniques. In this research work, the CO₂ capturing efficiency of MEA and DEA for both case are estimated with changes in weight concentration of (MEA & DEA), heights of absorber column, flow rate of amine solution and temperature of flue gas at specific diameter of absorber column.

3. Results and discussion

The present study has been done to estimate the carbon dioxide capturing efficiency for two different solvents such as monoethanolamine (MEA) and diethanolamine (DEA), at different operating condition such as amine solution flow rate varies from (100 std liter/min) to (600

std liter/min), absorber column height varies from .1 to 3 meter at constant diameter of absorber column (7.8 m), flue gas temperature from (293k to 333k) and weight concentration of absorbents in amine solution from (10 wt% to 70 wt%) for pre-combustion and post-combustion process. In present work the flow rate of flue gas is taken 2095 kmol/hr for both case pre and post at 1 bar absorber column height. In present work the flow sheet model of system is made on ChemCAD 6.1.3. The result of present work is explain with the help of graph between carbon dioxide capturing efficiency on y-axis and (wt% concentration of solvents, flow rate of amine solution, height of absorber column and temperature of flue gas) on x-axis.

3.1. Effect on CO₂ capturing efficiency of MEA varies in wt% concentration of MEA for both case precombustion and postcombustion CO₂ system at (300 std liter/min amine solution flow rate).

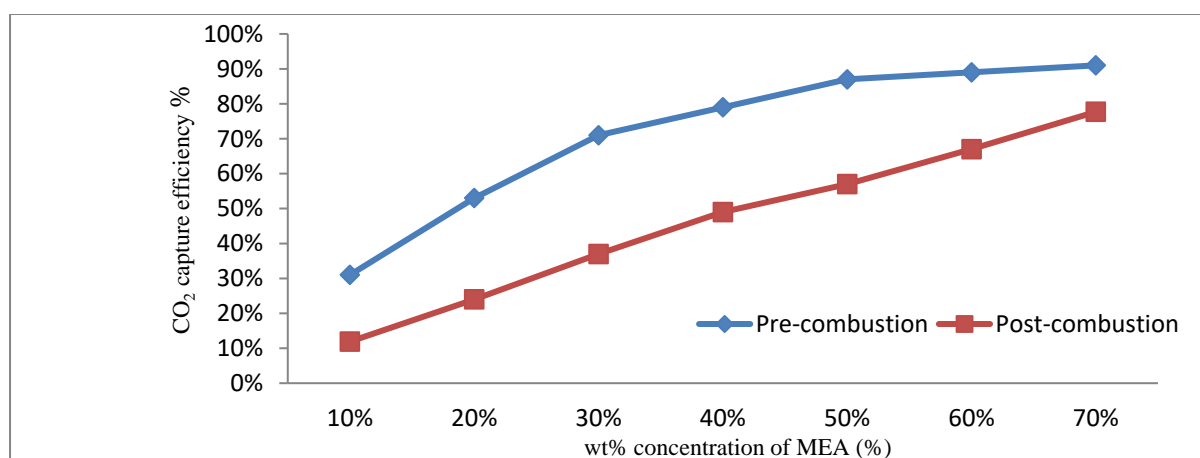


Figure 2 Comparison of CO₂ capturing efficiency of MEA for both caseprecombustion and postcombustion

From figure 2 it can say that the CO₂ capturing efficiency of MEA is continuously increase with varies in wt% concentration of MEA in aqueous amine solution for both cases, due to more concentration of MEA in aqueous amine solution, more MEA molecule react with molecule of CO₂, therefore the more molecule of CO₂ is absorb in MEA solution. From above figure it can see that the CO₂ capturing efficiency of MEA in pre-combustion case is more than post-combustion case, due to the different CO₂ composition in flue gas.

3.2. Effect on CO₂ capturing efficiency of DEA varies in wt% concentration of DEA for both case precombustion and postcombustion CO₂ system at (300 std liter/min amine solution flow rate).

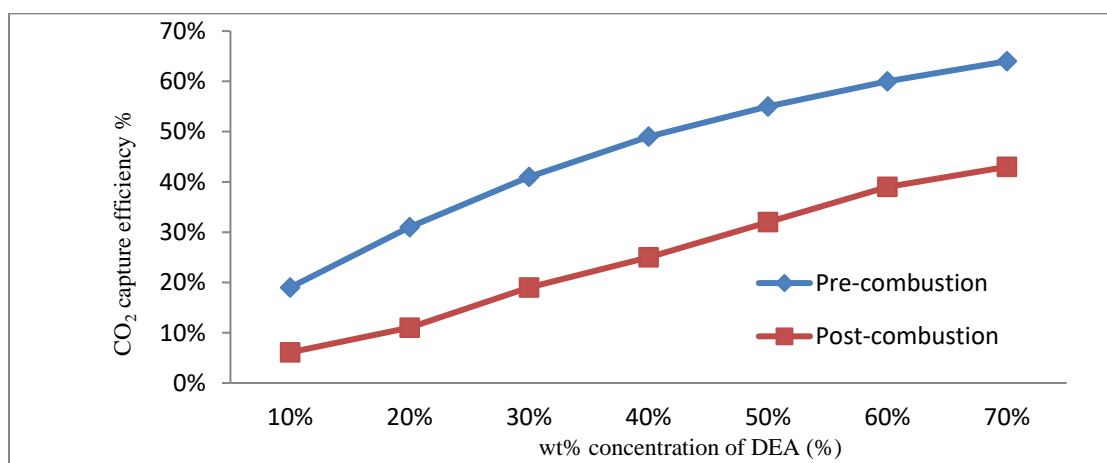


Figure 3 Comparison of CO₂ capturing efficiency of DEA for both case precombustion and postcombustion system

From figure 3 it can say that the CO₂ capturing efficiency of DEA is continuously increase with varies in wt% concentration of DEA in aqueous amine solution for both cases, due to more concentration of DEA in aqueous amine solution, more DEA molecule react with molecule of CO₂, therefore the more molecule of CO₂ is absorb in DEA solution. From above figure it can see that the CO₂ capturing efficiency of DEA in pre-combustion case is more than post-combustion case, due to the different CO₂ composition in flue gas.

3.3. Effect on CO₂ capturing efficiency of MEA varies in flow rate of amine solution from (100-600 std liter/min) for both cases precombustion and postcombustion CO₂ system at (30 wt%concentration of MEA)

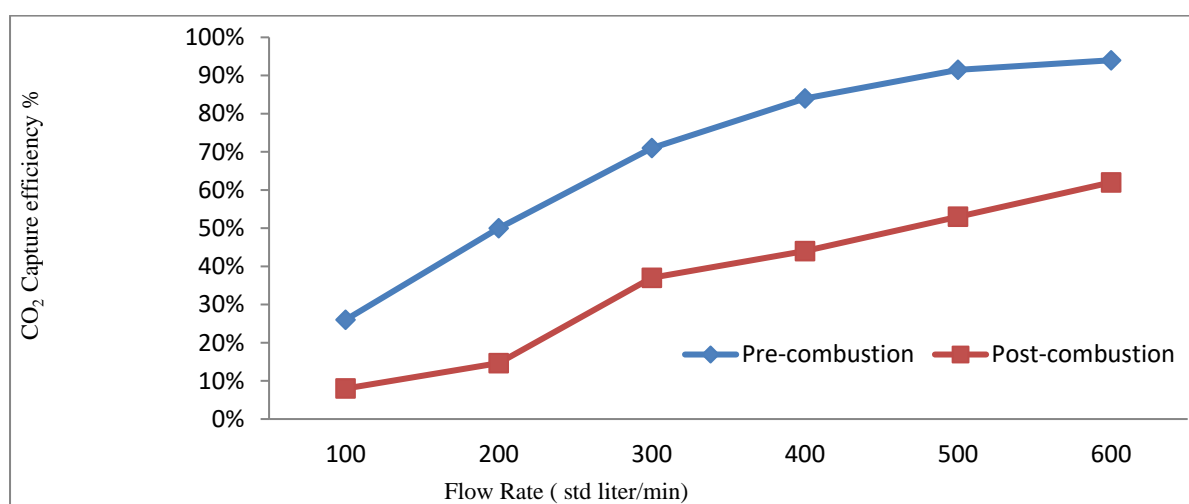


Figure 4 Comparison of CO₂ capturing efficiency of MEA for both case precombustion and postcombustion system

Figure 4 show the carbon dioxide capturing efficiency of MEA is continuously increases with increases in flow rate of amine solution in absorber column for both cases, because of chemical reaction rate between CO₂ and MEA solution is increase, due to fast rate of

chemical reaction between CO₂ molecule and MEA molecule, more CO₂ is absorb in MEA solution. From figure 4 it can say that the CO₂ capturing efficiency of MEA in pre-combustion case is more than post-combustion system.

3.4. Effect on CO₂ capturing efficiency of DEA varies in flow rate of amine solution from (100-600 std liter/min) for both cases precombustion and postcombustion CO₂ system at (30 wt%concentration of DEA)

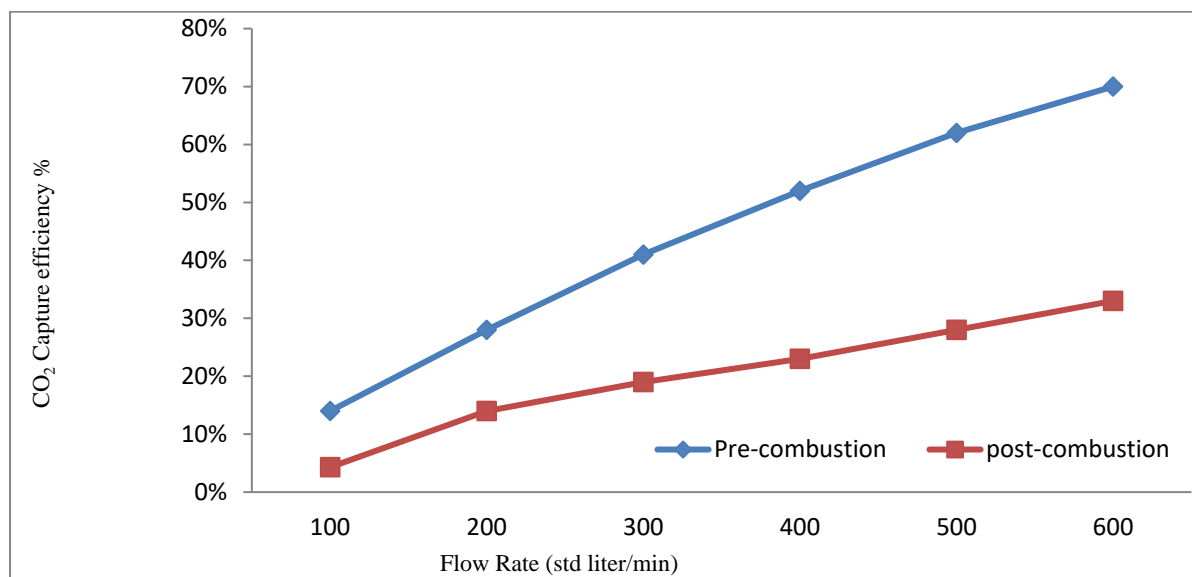


Figure 5 Comparison of CO₂ capturing efficiency of DEA for both case precombustion and postcombustion system

From figure 5 it can say that the carbon dioxide capturing efficiency of DEA is continuously increases with increases in flow rate of amine solution in absorber column for both cases, because of chemical reaction rate between CO₂ and DEA solution is increase, due to fast rate of chemical reaction between CO₂ molecule and DEA molecule, more CO₂ is absorb in DEA solution. From figure 5 it can say that the CO₂ capturing efficiency of DEA in pre-combustion case is more than post-combustion case.

3.5 Effect on CO₂ capturing efficiency of MEA varies in height of absorber column from (0.2m- 2m) at 30 wt% concentration of MEA, 300 std liter/min flow rate of amine solution for both cases

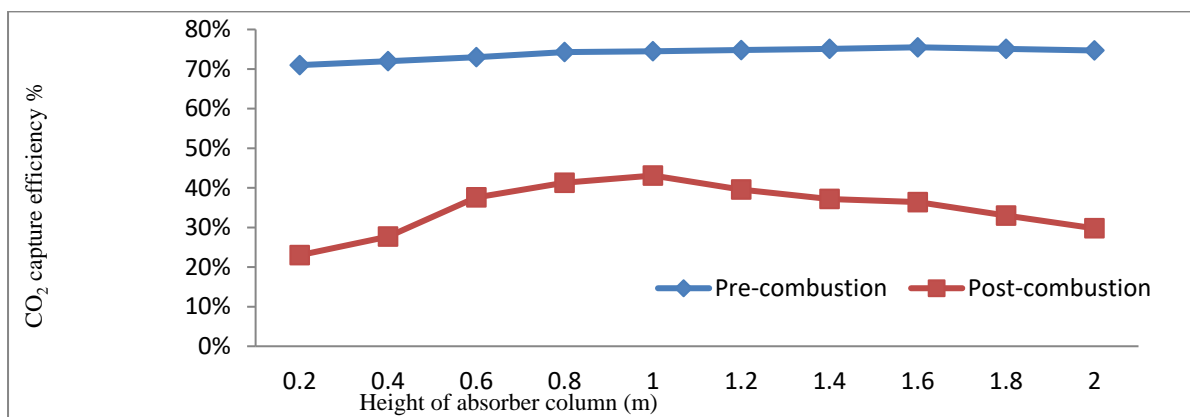


Figure 6 comparison of CO₂ capturing efficiency of MEA for both case precombustion and postcombustion system

Figure 6 shows the CO₂ capturing efficiency of MEA is first increases up to 1.6m (pre-combustion case) after that CO₂ capturing efficiency decreases, because of slow chemical reaction rate between CO₂ and MEA molecules, due to slow chemical reaction between CO₂ and MEA molecule, the CO₂ capturing efficiency of MEA is decreases after certain height of absorber column. In case of post-combustion system the CO₂ capturing efficiency of MEA is increases up to 1m height after that it goes to decreases. From figure 6 it can see that the CO₂ capturing efficiency of MEA in pre-combustion case is more than post-combustion case.

3.6 Effect on CO₂ capturing efficiency of DEA varies in height of absorber column from (0.2m- 2m) at 30 wt% concentration of DEA, 300 std liter/min flow rate of amine solution for both cases

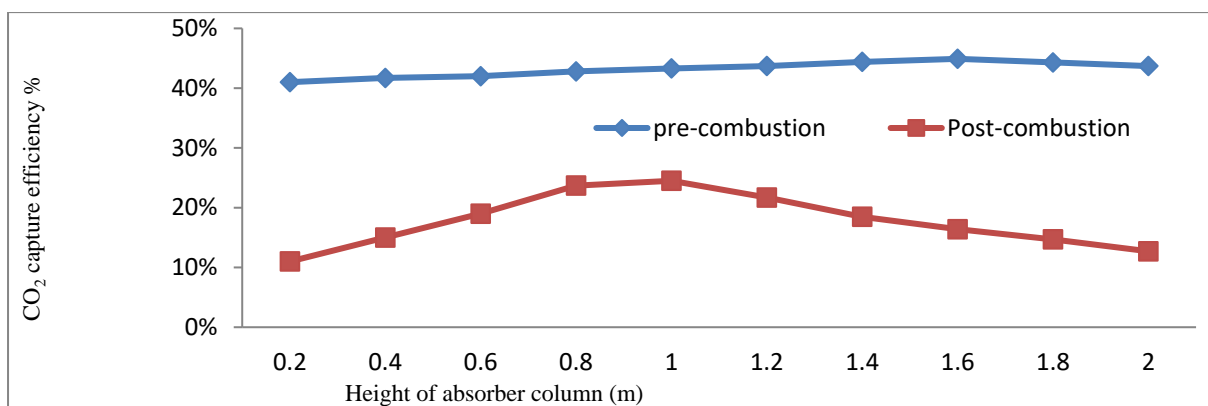


Figure 7 comparison of CO₂ capturing efficiency of DEA for both case precombustion and postcombustion system

Figure 7 shows the CO₂ capturing efficiency of DEA is first increases up to 1.6m (pre-combustion case) after that CO₂ capturing efficiency decreases, because of slow chemical reaction rate between CO₂ and DEA molecules, due to slow chemical reaction between CO₂ and DEA molecule, the CO₂ capturing efficiency of DEA is decreases after certain height of absorber column. In case of post-combustion system the CO₂ capturing efficiency of DEA is

increases up to 1m height after that it goes to decreases. From figure 7 it can see that the CO₂ capturing efficiency of DEA in pre-combustion case is more than post-combustion case.

3.7 Effect on CO₂ capturing efficiency of MEA varies in temperature of flue gas from (293k-333k) at 200 std liter/min (flow rate of amine solution) and 70 wt% concentration of MEA for both case

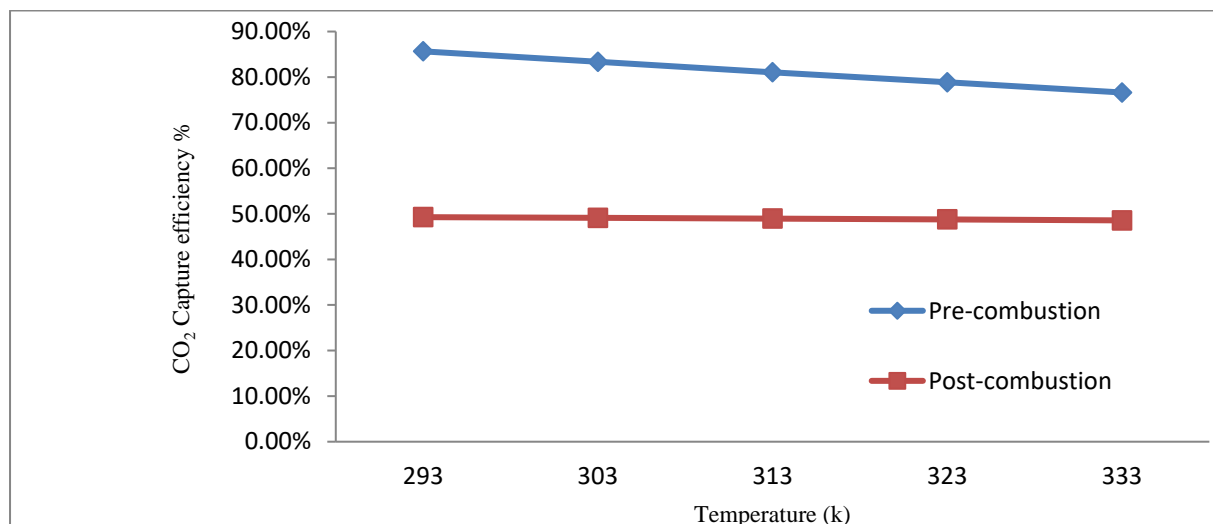


Figure 8 Comparison of CO₂ capturing efficiency of MEA for both cases

Figure 8 shows the CO₂ capturing efficiency of MEA is continuously decreases with increases in temperature of flue gas from 293k – 333k; because of more heat is produce when temperature of flue gas is increases. The produced heat increases the pressure of absorber column, due to more pressure is created inside the absorber column the chemical reaction become slow, because of slow chemical reaction rate the MEA molecules absorb less molecules of CO₂, therefore the CO₂ capturing efficiency of MEA is continuously decreases whenever temperature of flue gas increases. From figure 8 it can say that the CO₂ capturing efficiency of MEA in pre-combustion case is more than post-combustion case.

3.8 Effect on CO₂ capturing efficiency of DEA varies in temperature of flue gas from (293k-333k) at 200 std liter/min (flow rate of amine solution) and 70 wt% concentration of DEA for both case

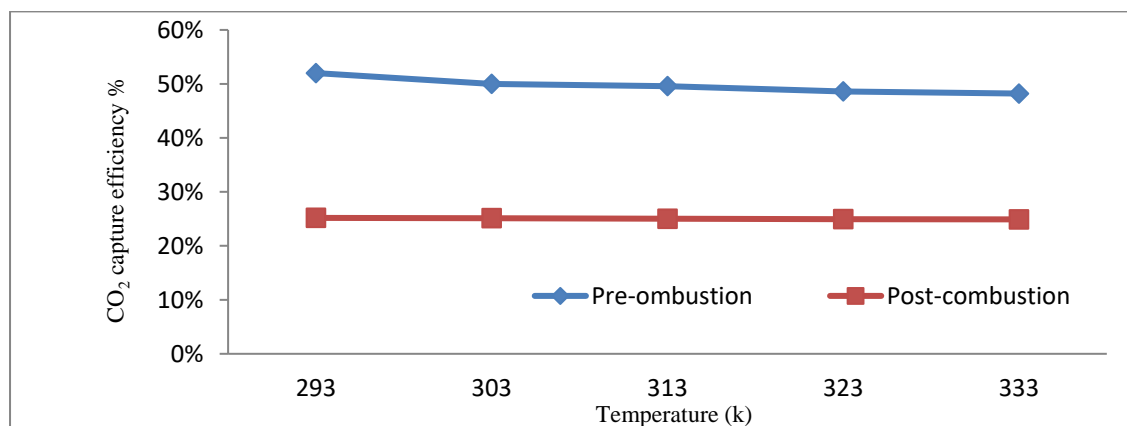


Figure 9 Comparison of CO₂ capturing efficiency of DEA for both cases

Figure 9 shows the CO₂ capturing efficiency of DEA is continuously decreases with increases in temperature of flue gas from 293k – 333k; because of more heat is produce when temperature of flue gas is increases. The produced heat increases the pressure of absorber column, due to more pressure is created inside the absorber column the chemical reaction become slow, because of slow chemical reaction rate the DEA molecules absorb less molecules of CO₂, therefore the CO₂ capturing efficiency of DEA is continuously decreases whenever temperature of flue gas increases. From figure 9 it can say that the CO₂ capturing efficiency of DEA in pre-combustion case is more than post-combustion case.

Conclusion

In this work a comparative analysis was made between MEA and DEA for precombustion and postcombustion CO₂ capture system by chemical absorption methods simulated on ChemCad 6.1.3 flow-sheet simulator. The operational parameters which affect the CO₂ capturing efficiency of MEA and DEA was studied without recycling the amine solution and wash- water in absorber column. The CO₂ capturing efficiency of MEA is more than DEA in both cases. The carbon dioxide capturing efficiency of solvents in pre-combustion case is more than post-combustion CO₂ capture system. The precombustion and postcombustion CO₂ capture system has major role to maintain the CO₂ emission because of in both case the 90% CO₂ capturing efficiency of solvents is achieved due to high CO₂ capturing efficiency, the less CO₂ emission is enter in the atmosphere. As we know that the global warming potential of greenhouse gas is depended on equivalent mass of CO₂. Therefore the global warming potential can be maintain to implement the precombustion and postcombustion CO₂ capture technology in new and old existing power plants.

References

- [1]. Anderson, Thomas R., Ed Hawkins, and Philip D. Jones. "CO₂, the greenhouse effect and global warming: from the pioneering work of Arrhenius and Callendar to today's Earth System Models." *Endeavour* 40.3 (2016): 178-187.
- [2]. Pelletier, Chloé, et al. "Effect of combustion technology and biogenic CO₂ impact factor on global warming potential of wood-to-heat chains." *Applied energy* 235 (2019): 1381-1388.
- [3]. Kothandaraman, Anusha. Carbon dioxide capture by chemical absorption: a solvent comparison study. Vol. 72.No. 01. 2010.
- [4]. Chen, Jindao, et al. "The effect of production structure on the total CO₂ emissions intensity in the Chinese construction industry." *Journal of Cleaner Production* 213 (2019): 1087-1095.
- [5]. Cuéllar-Franca, Rosa M., and AdisaAzapagic. "Carbon capture, storage and utilisation technologies: A critical analysis and comparison of their life cycle environmental impacts." *Journal of CO₂ utilization* 9 (2015): 82-102.
- [6]. Li, Jiazhen, et al. "Irrigation reduces the negative effect of global warming on winter wheat yield and greenhouse gas intensity." *Science of the Total Environment* 646 (2019): 290-299.
- [7]. Wang, Yuan, et al. "A review of post-combustion CO₂ capture technologies from coal-fired power plants." *Energy Procedia* 114 (2017): 650-665.
- [8]. Kumar, Ravinder, et al. "Status of carbon capture and storage in India's coal fired power plants: A critical review." *Environmental Technology & Innovation* (2018).
- [9]. Kanniche, Mohamed, et al. "Up-to-date CO₂ capture in thermal power plants." *Energy Procedia* 114 (2017): 95-103.
- [10]. Koytsoumpa, EfthymiaIoanna, Christian Bergins, and EmmanouilKakaras. "The CO₂ economy: Review of CO₂ capture and reuse technologies." *The Journal of Supercritical Fluids* 132 (2018): 3-16.
- [11]. Dinca, Cristian, NelaSlavu, and Adrian Badea. "Benchmarking of the pre/post-combustion chemical absorption for the CO₂ capture." *Journal of the Energy Institute* 91.3 (2018): 445-456.
- [12]. Mantripragada, Hari C., and Edward S. Rubin. "Chemical looping for pre-combustion and post-combustion CO₂ capture." *Energy Procedia* 114 (2017): 6403-6410.

- [13]. Kimura, Hajime, et al. "Environmental risk assessment of MEA and its degradation products from Post-Combustion CO₂ Capture Pilot Plant: Drafting technical guidelines." *Energy Procedia* 114 (2017): 6490-6500.
- [14]. Metz, Bert. "Special report on carbon dioxide capture and storage." <http://www.ipcc.ch/pub/reports.htm> (2007).
- [15]. Lang, Peter, Ferenc Denes, and Laszlo Hegely. "Comparison of different amine solvents for the absorption of CO₂." *Chemical Engineering Transactions* 61 (2017): 1105-1110.
- [16]. Aroonwilas, Adisorn, PaitoonTontiwachwuthikul, and Amit Chakma. "Effects of operating and design parameters on CO₂ absorption in columns with structured packings." *Separation and Purification Technology* 24.3 (2001): 403-411.
- [17]. García-Abuín, Alicia, et al. "Carbon dioxide capture with tertiary amines. Absorption rate and reaction mechanism." *Journal of the Taiwan Institute of Chemical Engineers* 80 (2017): 356-362.
- [18]. Aronu, Ugochukwu E., et al. "Equilibrium in the H₂O-MEA-CO₂ system: new data and modeling." *Chemical Engineering Science* (2011).