

The Balancing Techniques of Smart Grid in India's Power Grid System Management

¹Prof.Malini K V HOD,EEE, ²Sreenath H V ³Deepak R Patil ⁴Adarsh Agyeya ⁵Mahantesh Achar
EEE Department, Sri Sairam College Of Engineering, Bengaluru
,INDIA
Email: ¹hod.eee@sairam ce.edu.in, ²sreenathhv952@gmail.com
³adarshagyeya47@gmail.com ⁴child8deepak@gmail.com ⁵
Contact Number:: +91-9972992170¹, +919148903799²

Abstract: The movement in control equipment and electronic control development, the DG structures can be viably controlled to overhaul the system operation with upgraded PQ at PCC. The use of vitality gadgets based apparatus and non-coordinate burdens at PCC deliver symphonious streams, which debilitate the idea of vitality. A converter is being used which can be used both as a rectifier and an inverter. In this paper concentrated on the network interfacing inverter can adequately be used to perform following critical capacities:

- 1) Transfer of dynamic power reaped from the sustainable assets (wind, sun oriented, and so forth.);
- 2) Stack responsive power request bolster;
- 3) Current sounds remuneration at PCC; and
- 4) Current unbalance and unbiased current remuneration if there should be an occurrence of 3-stage 4-wire framework. In addition, with satisfactory control of lattice interfacing inverter, all the four goals can be refined either exclusively or at the same time. The PQ requirements at the PCC can along these lines be entirely kept up inside the utility models without extra equipment cost.

I. INTRODUCTION

Electric utilities and end clients of electric power are getting to be noticeably worried about taking care of the developing vitality demand. 75 percent of aggregate worldwide vitality request is provided by the consuming of non-renewable energy sources. Regardless, extending air tainting, a perilous environmental deviation concerns, diminishing oil based goods and their growing expense have made it important to look towards boundless sources as a future imperativeness course of action. There has been a gigantic enthusiasm for countries on reasonable power hotspot for power age. The market movement and government's impulses have enlivened the reasonable power source section advancement..

The movement in control contraptions and automated control development, the DG structures can be successfully controlled to redesign the system operation with improved PQ at PCC. The use of vitality equipment based apparatus and non-straight loads at PCC create consonant streams, which debilitate the idea of vitality. Current controlled voltage source inverters are used to interface the unpredictable RES in appropriated structure. Starting late, several control techniques for organize related inverters uniting PQ plan have been proposed. In an inverter acts as unique inductor at a particular repeat to hold the consonant current. In any case, the right

tally of framework inductance ceaselessly is troublesome and may crumble the control execution. A similar approach in which a shunt dynamic channel goes about as unique conductance to damp out the music available for use sort out is proposed. A control strategy for unlimited interfacing inverter in light of – theory is proposed.

In this procedure both load and inverter current detecting is required to repay the heap current music.

The non-straight load current harmonics may result in voltage harmonics and can make a serious PQ issue in the power system organize. Active power filters (APF) are extensively used to compensate the heap current harmonics and load unbalance at distribution level. This results in an extra equipment cost. In any case, in this paper authors have consolidated the features of APF in the, regular inverter interfacing sustainable with the lattice, with no extra equipment cost. Here, the fundamental thought is the greatest usage of inverter rating which is most of the time underutilized because of discontinuous nature of RES. It is shown in this paper the framework interfacing inverter can viably be used to perform following vital functions: 1) transfer of active power harvested from the sustainable resources (wind, solar, and so forth.); 2) stack reactive power request support; 3) current harmonics compensation at PCC; and 4) current unbalance and nonpartisan current compensation in case of 3-phase 4-wire system. Additionally, with satisfactory control of network interfacing inverter, all the four objectives can be accomplished either

exclusively or simultaneously. The PQ constraints at the PCC can along these lines be strictly kept up inside the utility standards without extra equipment cost.

II. DISTRIBUTED GENERATION

Distributed generation, likewise approached site generation, scattered generation, installed generation, decentralized generation, decentralized vitality or distributed vitality creates electricity from numerous little vitality sources. At present, industrial nations create a large portion of their electricity in huge brought together offices, for example, fossil fuel (coal, gas controlled) atomic or hydropower plants. These plants have great economies of scale, however as a rule transmit electricity long separations and adversely influence the earth.

For instance, coal control plants are manufactured far from urban communities to keep their substantial air contamination from affecting the people. Also, such plants are regularly worked close collieries to minimize the cost of transporting coal. Hydroelectric plants are by their temperament restricted to operating at locales with adequate water stream. Most power plants are regularly thought to be too far away for their waste warmth to be utilized for heating buildings.

Low contamination is a pivotal preferred standpoint of combined cycle plants that consume gaseous petrol. The low contamination allows the plants to be sufficiently close to a city to be utilized for region heating and cooling. Distributed generation is another approach. It decreases the measure of vitality lost in transmitting electricity in light of the fact that the electricity is produced extremely close where it is utilized, maybe even in a similar building. This additionally diminishes the size and number of electrical cables that must be built.

Run of the mill distributed power sources in a Feed-in Tariff (FIT) plot have low maintenance, low contamination and high efficiencies. Previously, these characteristics required committed operating engineers and expansive complex plants to lessen contamination. In any case, current inserted frameworks can furnish these characteristics with computerized operation and sustainable, for example, daylight, wind and geothermal. This lessens the measure of energy plant that can demonstrate a benefit.

2.1 Distributed energy resource

Distributed energy resource (DER) frameworks are little scale control age advances (commonly in the range of 3 kW to 10,000 kW) used to give a contrasting option to or an upgrade of the conventional electric power framework. The standard issues with distributed generators are their high expenses.

One famous source is sunlight based boards on the roofs of buildings. The creation cost is \$0.99 to 2.00/W (2007) or more installation and supporting hardware unless the installation is Do it yourself (DIY) bringing the cost to \$6.50 to 7.50 (2007).

This is practically identical to coal control plant expenses of \$0.582 to 0.906/W (1979), adjusting for inflation. Nuclear power is higher at \$2.2 to \$6.00/W (2007).^[4] Some solar cells ("thin-film" type) also have waste disposal issues; since "thin-film" type solar cells often contain heavy-metal electronic wastes, such as Cadmium telluride (CdTe) and Copper indium gallium selenide (CuInGaSe), and need to be recycled. As opposed to silicon semi-conductor type solar cells which is made from quartz. The plus side is that not at all like coal and atomic, there are no fuel costs, contamination, mining security or working wellbeing issues. Sun based additionally has a low obligation cycle, creating top power at neighborhood twelve every day. Normal obligation cycle is commonly 20%.

2.2 Distributed Energy Systems:

Today, new advances in technology and new directions in electricity regulation encourage a significant increase of distributed generation resources around the world. As shown in Fig. the currently competitive small generation units and the incentive laws to use renewable energies force electric utility companies to construct an increasing number of distributed generation units on its distribution network, instead of large central power plants. Moreover, DES can offer improved service reliability, better economics and a reduced dependence on the local utility.

Distributed Generation Systems have mainly been used as a standby power source for critical businesses. For example, most hospitals and office buildings had stand-by diesel generation as an emergency power source for use only during outages. However, the diesel generators were not inherently cost-effective, and produce noise and exhaust that would be objectionable on anything except for an emergency basis.

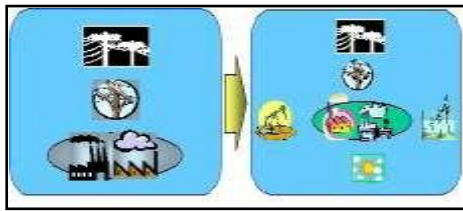


Fig 2.1: A large central power plant and distributed energy systems

Meanwhile, recently, the use of Distributed Energy Systems under the 500 kW level is rapidly increasing due to recent technology improvements in small generators, power electronics, and energy storage devices. Efficient clean fossil fuels technologies such as micro-turbines and fuel cells, and environmentally friendly renewable energy technologies such as solar/photovoltaics, small wind and hydro are increasingly used for new distributed generation systems.

2.3 Problem Statements:

DES innovations have altogether different issues contrasted and conventional concentrated power sources. For instance, they are connected to the mains or the heaps with voltage of 480 volts or less; and require control converters and diverse procedures of control and dispatch. These essentialness progressions give a DC yield which requires control electronic interfaces with the dispersion control systems and its heaps. By and large the change is performed by utilizing a voltage source inverter (VSI) with a probability of heartbeat width tweak (PWM) that provides quick direction for voltage greatness. Power electronic interfaces present new control issues, yet in the meantime, new conceivable outcomes. For instance, a framework which comprises of smaller scale generators and capacity gadgets could be intended to work in both a self-sufficient mode and associated with the power lattice. One expansive class of issues is identified with the way that the power sources, for example, miniaturized scale turbines and energy component have moderate reaction and their idleness is considerably less.

It must be recollected that the present power frameworks have capacity in generators' latency, and this may bring about a slight diminishment in framework recurrence. As these generators turn out to be more reduced, the need to interface them to bring down system voltage is altogether expanding.

In any case, with no medium voltage systems adjustment, this quick extension can influence the nature of supply and in addition people

in general and hardware security since dispersion networks have not been intended to interface a lot of age. In this way, another voltage control framework to encourage the association of conveyed age assets to circulation networks ought to be produced. As a rule there are additionally significant specialized obstructions to working self-sufficiently in an autonomous AC structure, or to partner little age systems to the electrical scattering coordinate with cut down voltage and the ebb and flow look into issues consolidates:

1. Control methodology to encourage the relationship of passed on age resources for dispersal frameworks.
2. Gainful battery control.
3. Inverter control in perspective of just neighbourhood information.
4. Synchronization with the utility mains.
5. Remuneration of the responsive power and higher symphonies parts.
6. Power Factor Correction.
7. Framework insurance.
8. Load sharing.
9. Unwavering quality of correspondence.
10. Prerequisites of the client.

DES offers huge research and building challenges in taking care of these issues. Also, the electrical and financial connections amongst clients and the conveyance utility and among clients may take shapes very unmistakable from those we know today.

For example, instead of contraptions being autonomously interconnected in parallel with the matrix, they may be amassed with loads in a semi-self-overseeing neighborhood that could be named a smaller scale network is a gathering of little sources, accumulating structures, and weights which presents itself to the lattice as a veritable single component. Consequently, future research work will concentrate on settling the above issues so DES with more favorable circumstances contrasted and custom huge power plants can flourish in electric power industry.

2.5 Configurations for DES:

Case I:

A Power Converter related in a Standalone AC System or in Parallel with the Utility Mains Fig. demonstrate a scattered power framework which is related with direct stack or in parallel with utility mains, as indicated by its mode. This framework comprises of a generator, an

information channel, an AC/AC control converter, a yield channel, a segregation transformer, yield sensor (V, I, P), and a DSP controller. In the Figures, a dispersed generator may work as one of three modes: a standby, a pinnacle shaving and an independent power source. In a standby mode appeared in Fig. a generator set fills in as an UPS framework working amid mains disappointments. It is utilized to expand the unwavering quality of the vitality supply and to upgrade the general execution of the framework. The static switch SW 1 is shut in ordinary operation and SW 2 is open, while if there should be an occurrence of mains disappointments or unnecessary voltage drop location SW 1 is open and SW 2 is all the while shut. For this situation, control strategies of DES are fundamentally the same as those of UPS. In the event that a transient load expands, the yield voltage has moderately substantial drops because of the inward impedance of the inverter and channel arrange, which often result in breakdown of touchy load. Fig. can fills in as a pinnacle shaving or interconnection with the matrix to sustain control back to mains.

In the two modes, the generator is related in parallel with the standard grids. In a pinnacle shaving mode, this generator is running as few as a couple of hundred hours consistently in light of the fact that the SW 1 is simply closed in the midst of the obliged periods. Meanwhile, in an interconnection with the matrix, SW 1 is continually closed and this framework outfits the cross section with tireless electric power. In addition, the converter related in parallel to the mains can serve similarly as a wellspring of reactive power and higher symphonious current sections.

In an autonomous AC framework showed up in Fig. 1, the generator is specifically associated with the heap lines without being associated with the mains and it will work autonomously. For this situation, the operations of this framework are like a standby mode, and it serves consistently not at all like a standby mode and a pinnacle shaving mode.

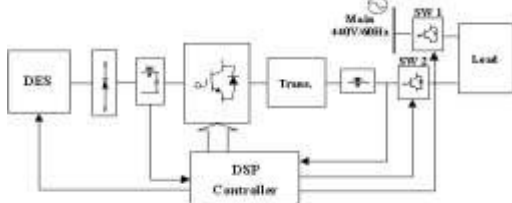


Fig 2.5: Block diagram of power converters connected in parallel

IV. ACTIVE POWER FILTERS

4.1 Classification according to power circuit, configurations and connections:

The choice of power circuit chosen for the active filter greatly influences its efficiency and accuracy in providing true compensation. It is therefore important that the correct circuit configuration is chosen. Figure 5.2 classifies three major types of filter structures along with the relevant power circuit.

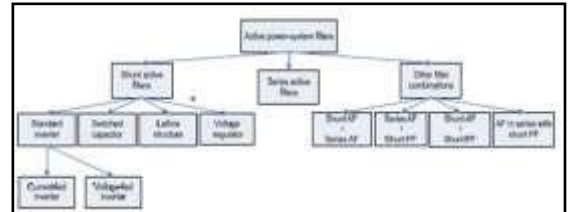


Fig 4.1: Subdivision of power system filters according to power circuit configurations and connections

4.1.1 Shunt active filters:

Shunt dynamic channels are by a wide margin the most generally acknowledged and predominant channel of decision in most mechanical procedures. Figures demonstrate the framework arrangement of the shunt outline. The dynamic channel is associated in parallel at the PCC and is sustained from the primary power circuit. The target of the shunt dynamic channel is to supply contradicting symphonious current to the nonlinear load successfully bringing about a net consonant current.

This implies the supply signals remain simply major. Shunt channels likewise have the extra advantage of adding to receptive power remuneration and adjusting of three-stage streams. Since the dynamic channel is associated in parallel to the PCC, just the pay current in addition to a little measure of dynamic essential current is conveyed in the unit. For an expanded scope of energy appraisals, a few shunt dynamic channels can be joined together to withstand higher streams. This design comprises of four particular classes of circuit, to be specific inverter arrangements, exchanged capacitor circuits, cross section organized channels and voltage-controller sort.

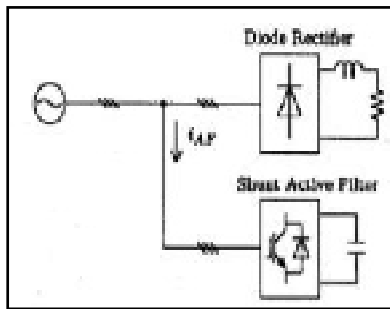


Fig 4.2: Shunt active filter used alone

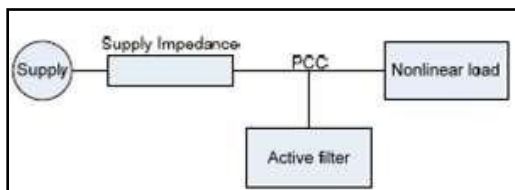


Fig 4.3: Shunt active filter network configuration

4.1.2 Series active filters:

The goal of the arrangement dynamic channel is to keep up an unadulterated sinusoidal voltage waveform over the heap. This is accomplished by delivering a PWM voltage waveform which is included or subtracted against the supply voltage waveform. The choice of power circuit used in most cases is the voltage-fed PWM inverter without a current minor loop.

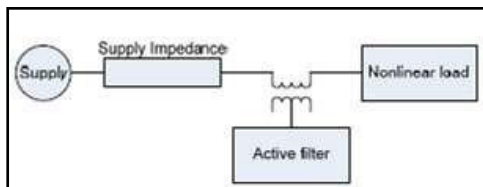


Fig 4.4: Series active filter configuration

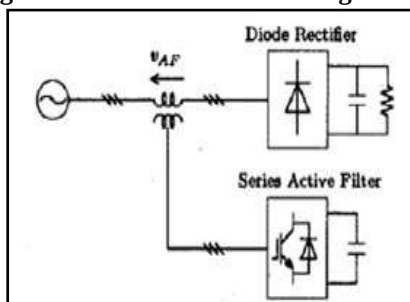


Fig 4.5: series active filter used alone

4.1.3 Other combinations:

In some cases, the combinations of shunt and series active filters provide a greater effectiveness in eliminating harmonic pollution from the system.

- Combination of both shunt and series active filters:

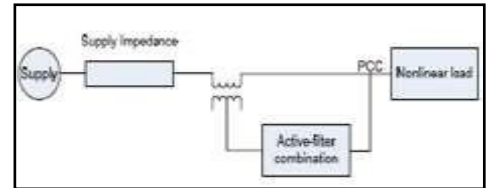


Fig 4.6: Combination of shunt & series active filters

- Combination of series active and shunt passive filters:

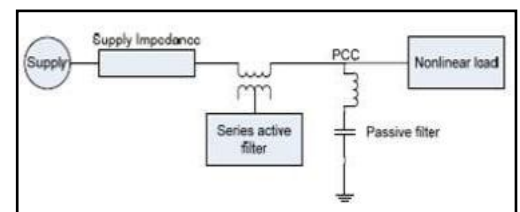


Fig 4.7: Series active & shunt filter combination

- Combination of shunt active and passive filters:

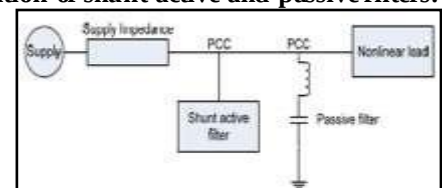


Fig 4.8: Shunt active & shunt passive filter combination ➤ Active filter in series with shunt passive filters:

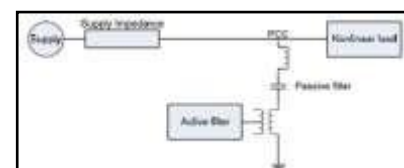


Fig 4.9: Active filter in series with shunt passive filter combination

V. DISTRIBUTION SYSTEM

5.1 Classification of Distribution System:

A distribution system may be classified according to:

5.1.1 Nature of current:

According to nature of current, distribution system might be delegated (a) d.c. appropriation system and (b) a.c. conveyance system. Presently a-days a.c. system is generally received for appropriation of electric power as it is easier and more prudent than coordinate current technique.

5.1.2 Type of development:

According to type of development, dissemination system might be delegated (an) overhead system and (b) underground system. The overhead system is by and large utilized for appropriation as it is 5 to 10 times less expensive than the equal underground system. As a rule, the underground system is utilized at places where overhead development is impracticable or disallowed by the neighborhood laws.

5.1.3 Scheme of connection:

According to scheme of connection, the dissemination system might be delegated (a) radial system, (b) ring fundamental system and (c) between associated system. a. Radial System:

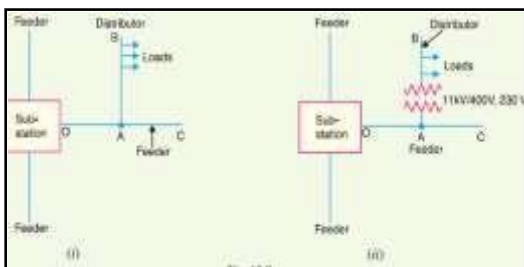


Fig 5.1: (i) A.C Distribution System & (ii) D.C Distribution System

b. The Ring Main System:

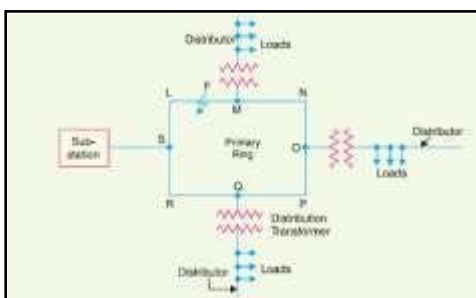


Fig 5.2: Ring main system

c. Interconnected System:

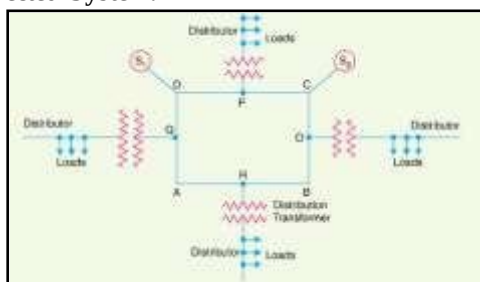


Fig 5.3: Inter-connected System

VI. Renewable ENERGY SOURCES

Energy that originates from assets which are normally recharged on a human timescale, for example, daylight, wind, rain, tides, waves and geothermal warmth is named as inexhaustible energy. the most regular definition is that sustainable power source is from an energy asset that is supplanted by a characteristic procedure at a rate that is equivalent to or quicker than the rate at which that asset is being expended. Renewable energy is a subset of sustainable 5.energy. 6.

6.2 Main types of renewable energy sources:

The main items under RSE are as follows:

- . Hydro Power
- . Solar Power
- . Wind Power
- . Bio-mass Power

Energy from waste

Ocean energy

Alternative fuel for surface transportation

VII. SIMULATION SETUP AND RESULT ANALYSIS In

7.1 The Platform

All the simulation, implementation and analysis work was done on Windows seven. Since the platform provided the premise for doing everything, so it becomes essential to debate some options and additionally somewhat on however it evolved and the way is actively operating behind the scenes.

7.2Simulation setup

About of MATLAB

Matlab may be a software package package that helps you to do arithmetic and computation, analyze information, develop algorithms, do simulation and modeling, and turn out graphical displays and graphical user interfaces. Typical uses include:

- Math and computation
- Algorithm development
- Data acquisition
- Modeling, simulation, and prototyping
- Data analysis, examination, and apparition
- Scientific and engineering graphics
- Application development, including graphical user interface building

7.3: GUI Programming

After birthing out the graphical user interface and setting element properties, subsequent step is to program the graphical user interface. we will program the graphical user interface by secret writing one or additional callbacks for every of its parts. Callbacks area units are that execute in response to some action by the user. A typical action is clicking a push button.



Fig. 7.3 Snapshot of Programming in GUI

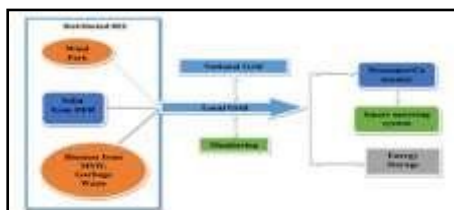


Fig 7.4 proposed model

The load calculations are done using standard forms of the utilities. The HOMER based analysis focuses on balancing as well as the maximization of power production and consumption. Figure 2 shows the HOMER implementation of the model

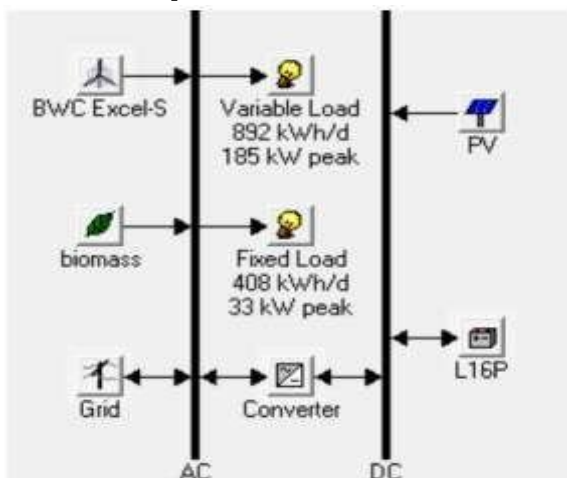


Fig 7.5 distribution set up

Simulations of Smart-Meter Using MATLAB with GUI



Fig 7.6 power calculation

The figure shows a zoom on the transient caused by a fault at Bus B4, at 18h03 on day 126 (May 6th).

The Phasor solution produced simulation results to the millisecond precision at the programmed fault timing

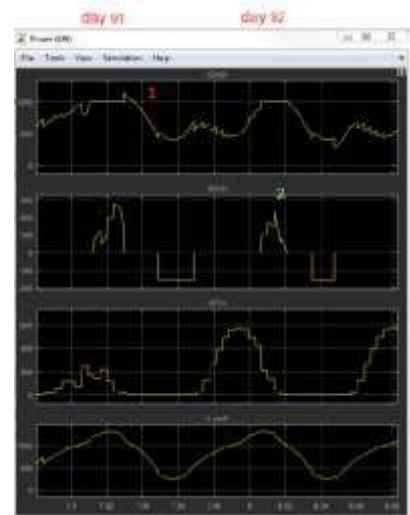


Fig 7.7 power calculation

Result analysis

A situation has been shown one utilization of this case: The goal is to decide suitable estimating (control and limit) of a gear associated with a 600V people group electrical framework, keeping in mind the end goal to keep the group from acquiring more power than concurred with the organization. In perspective of a given load profile, PV develop yield, control rating and point of confinement, the generation will give the amount of detachment for a whole year. This estimating study can be performed for various regions

VIII. CONCLUSION

This theory has presented a novel control of a current lattice interfacing inverter to enhance the nature of

power at PCC for a 3-phase 4-wire DG system. It has been demonstrated that the lattice interfacing inverter can be viably used for power molding without influencing its typical operation of genuine power exchange. The lattice interfacing inverter with the proposed approach can be used to:

i) Inject genuine power created from RES to the lattice, or

potentially, ii) Operate as a shunt Active Power Filter (APF).

This approach accordingly disposes of the requirement for extra power molding gear to enhance the nature of power at PCC. Extensive MATLAB/Simulink simulation as well as the DSP based experimental results have validated the proposed approach and have shown that the grid-interfacing inverter can be utilized as a multifunction device.

REFERENCES

- [1] J. M. Guerrero, L. G. de Vicuna, J. Matas, M. Castilla, and J. Miret, "A wireless controller to enhance dynamic performance of parallel inverters in distributed generation systems," *IEEE Trans. Power Electron.*, vol. 19, no. 5, pp. 1205–1213, Sep. 2004.
- [2] J. H. R. Enslin and P. J. M. Heskes, "Harmonic interaction between a large number of distributed power inverters and the distribution network," *IEEE Trans. Power Electron.*, vol. 19, no. 6, pp. 1586–1593, Nov. 2004.
- [3] U. Borup, F. Blaabjerg, and P. N. Enjeti, "Sharing of nonlinear load in parallel-connected three-phase converters," *IEEE Trans. Ind. Appl.*, vol. 37, no. 6, pp. 1817–1823, Nov./Dec. 2001. Jintakosonwitt, H. Fujita, H. Akagi, and S. Ogasawara, "Implementation and performance of cooperative control of shunt active filters for harmonic damping throughout a power distribution system," *IEEE Trans. Ind. Appl.*, vol. 39, no. 2, pp. 556–564, Mar./Apr. 2003.
- [4] J. P. Pinto, R. Pregitzer, L. F. C. Monteiro, and J. L. Afonso, "3-phase 4-wire shunt active power filter with renewable energy interface," presented at the Conf. IEEE Renewable Energy & Power Quality, Seville, Spain, 2007.
- [5] F. Blaabjerg, R. Teodorescu, M. Liserre, and A. V. Timbus, "Overview of control and grid synchronization for distributed power generation systems," *IEEE Trans. Ind. Electron.*, vol. 53, no. 5, pp. 1398–1409, Oct. 2006.
- [6] Stein, J., R. Perez, A. Parkins, Validation of PV Performance Models using Satellite-Based Irradiance Measurements: A Case Study, SOLAR2010, Phoenix, AZ, 2010
- [7] Perez, R., J. Schlemmer, D. Renne, S. Cowlin, R. George, B. Bandyopadhyay, Validation of the SUNY Satellite Model in a Meteosat Environment, Proc., ASES Annual Conference, Buffalo, NY, 2009
- [8] Stackhouse, P., T. Zhang, W. S. Chandler, C. H. Whitlock, J. M. Hoell, D. J. Westberg, R. Perez, S. Wilcox, Satellite Based Assessment of the NSRDB Site Irradiances and Time Series from NASA and SUNY/Albany Algorithms, Proc. ASES Annual Meeting, San Diego, CA, 2008
- [9] Glasbey, C. A., Nonlinear autoregressive time series with multivariate Gaussian mixtures as marginal distributions, *Applied Statistics* 50: 143-154, 2001
- [10] Skartveit, A. and J. A. Olseth, The probability density and autocorrelation of short-term global and beam irradiance, *Solar Energy* 49(6) pp. 477-487, 1992